

Oil-Only Absorbency

Absorb oil- and petroleum-based fluids while repelling water

Oil-only absorbents are specially designed to clean-up oils and petroleum-based liquids while also repelling water and floating indefinitely.

Unaffected by temperature and impervious to rot and mildew, oil-only absorbents are an ideal choice for outdoor use, in bodies of water or anywhere that water may be inadvertently absorbed.

Oil-only absorbent family

All oil-only pads and rolls start with a highly absorbent polypropylene core. From there, it's all about the application. Product families feature different weights, coverstocks and finishing to provide the right solution for your needs.



Liquids absorbed

- Drilling and cutting fluids
- Gasoline, diesel and aircraft fuels
- Hydraulic and brake fluids
- Cooking oils
- Engine oils
- Oil-based paints and solvents
- Transmission fluids
- Other oils and petroleum-based fluids
- Lubricants

Popular applications

- Outdoors
- Around machinery
- Around bodies of water
- Outdoor storage containers
- Wiping tools
- Under dripping valves
- Small spills
- Other general purpose maintenance
- Under leaky pipes



Wiping



Drips



Outdoors

Oil-Only Absorbency

★★★Best

★★Better

★Good



Oil-Only Pads and Rolls

Product summary

- Absorbs:** Oils, coolants, solvents and oil-based fluids
- Coverstock:** No coverstock (1-ply)
- Durability:** ✓✓
- Linting:** Medium linting
- Absorbencies:** Heavy, medium and light weight
- Cost:** \$ \$

Recommended for

- Anywhere there is a leak, spill or drip
- Marine and environmental spills
- Oil refineries / fuel chemical
- General manufacturing


SPC® Oil Absorbents

Brady SPC's best-selling oil-only pads for industrial or marine use.

- Oil-only absorbency for petroleum-based oils, solvents and other non-water soluble liquids
- Floats indefinitely even when saturated with oil
- Efficient single-ply construction of MAXX® absorbent technology — absorption and strength without the extra weight

Additional features

- **Perforated:** Select exactly the size you need
- **Dimpled:** Adds durability and reduces linting
- **Blue package color:** SPC oil absorbents are packaged in a blue bag to streamline absorbent identification in your facility

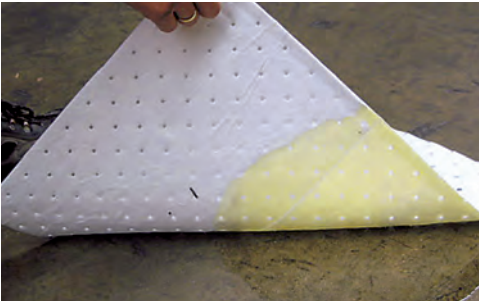

SPC105 features blue coverstock on one side.

SPC Oil Pads

Pre-cut pads are ideal for wiping or catching drips.

Catalog #	Type	Size	Perforated	Absorbency Factor (g/gs)	Absorbency Capacity (gal)	Shipping Wt. (lbs)	Pallet Qty.	Quantity
SPC50	Heavy-weight pad	33 in. x 39 in.	No	18	73	33.5	10	50/bale*
SPC100	Heavy-weight pad	15 in. x 19 in.	Yes, 7.5 in.	18	35	14	30	100/bale*
SPC105	Heavy-weight pad (1 side w/blue coverstock)	15 in. x 19 in.	Yes, 7.5 in.	18	24	14	30	100/bale*
SPC300	Medium-weight pad	15 in. x 19 in.	Yes, 7.5 in.	18	30	11	30	100/bale*
SPC200	Light-weight pad	15 in. x 19 in.	Yes, 7.5 in.	18	51	16	24	200/bale*
SPC500	Light-weight pad	15 in. x 19 in.	Yes, 7.5 in.	18	20	8.2	36	100/bale*

*SPC Oil Absorbents packaged in a blue bag.



SPC Oil Rolls

Continuous rolls are ideal for covering larger areas.

Blanket rolls maximize absorbency and can be cut to size.

Catalog #	Type	Size	Perforated	Absorbency Factor (g/gs)	Absorbency Capacity (gal)	Shipping Wt. (lbs)	Pallet Qty.	Quantity
SPC150	Heavy-weight roll	38 in. x 144 ft.	No	15	70	33	18	1/bale*
SPC152	Heavy-weight roll	19 in. x 144 ft.	No	15	70	33	18	2/bale*

*SPC Oil Absorbents packaged in a blue bag.

Chemical Application Guide

Universal Polypropylene Products:

- Battlemat® Absorbents
- UXT Absorbents
- HT Absorbents
- MRO Plus® Absorbents
- GP Absorbents
- Basic Universal Absorbents
- SIR and BSM Mats
- AllWIK® SOCs and Pillows
- Cobra Coil® SOCs

Oil-Only Polypropylene Products:

- Oil-only SOCs and Pillows
- Trackmat Absorbents
- SXT® Oil Absorbents
- Oil Plus Absorbents
- SPC® Oil Absorbents
- ENV® Oil Absorbents
- Basic Oil-only Absorbents
- Static Resistant Absorbents

Chemical Polypropylene Products:

- BRIGHTSORB™ High Visibility Absorbents
- Chemical Absorbents
- Universal Plus Absorbents
- HAZWIK SOCs and Pillows

Organic Eco-Friendly Products:

- Re-Form™ Absorbents
- Re-Form Plus Absorbents
- Re-Form XPlus Absorbents
- Re-Form Oil-only Absorbents
- MULTIWIK® and SLIKWIK® SOCs
- SPC Granular
- Re-Form Granular
- Rag Rug Absorbents

Chemical	Universal	Oil only	Chemical	Organic
Acetaldehyde	X		X	X
Acetic Acid	X		X	
Acetic Anhydride	X		X	
Acetone	X	X	X	X
Acetyl Chloride	X		X	
Acrolein	X	X	X	
Acrylonitrile	X		X	X
Allyl Alcohol	X		X	X
Aminobenzoic Acid	X		X	
Ammonia (Anhydrous)	X	X	X	X
Ammonium Hydroxide	X	X	X	X
Amyl Acetate	X	X	X	
Amyl Alcohol	X		X	X
Aniline	X		X	X
Antifreeze	X		X	X
Aqua Regia	X		X	
Aqueous Ammonia	X		X	
Aviation Fuel	X	X	X	X
Benzene	X	X	X	X
Benzoic Acid	X		X	
Benzonitrile	X		X	
Benzoyl Chloride	X		X	
Benzyl Alcohol	X		X	X
Boric Acid	X		X	
Brake Fluid	X	X	X	X
Bromine	X		X	
Butyl Acetate	X	X	X	
Butyl Alcohol	X	X	X	X
Butylamine	X		X	X
Butyric Acid	X	X	X	
Calcium Hydroxide	X		X	
Carbolic Acid	X		X	
Carbon Disulfide	X		X	
Carbon Tetrachloride	X	X	X	X
Castor Oil	X	X	X	X
Chlorine Water	X		X	
Chloroacetic Acid	X		X	
Chlorobenzene	X		X	
Chloroform	X	X	X	X
Chromic Acid (50%)	X		X	
Chlorosulfonic Acid	X		X	
Citric Acid	X		X	
Clorox (Full Strength)	X		X	X
Corn Oil	X	X	X	X
Cottonseed Oil	X	X	X	X
Cresol	X	X	X	X
Cyclohexane	X	X	X	X
Detergents	X		X	X

Chemical	Universal	Oil only	Chemical	Organic
Dichlorobenzene	X	X	X	
Diethylamine	X	X	X	
Diethyl Ether	X	X	X	X
Disooctyl Phthalate	X	X	X	X
Dinitrobenzene	X	X	X	
Dioxan	X		X	X
Electrolyte Fluid	X		X	
Ether	X	X	X	X
Ethyl Acetate	X	X	X	X
Ethyl Alcohol	X	X	X	X
Ethyl Benzene	X	X	X	
Ethyl Chloride	X	X	X	
Ethyl Ether	X	X	X	X
Ethyl Propionate	X	X	X	X
Ethylene Glycol	X		X	X
Fluorosilicic Acid	X		X	
Formaldehyde	X		X	X
Formic Acid	X		X	
Fuel Oil	X	X	X	X
Gasoline	X	X	X	X
Gearbox Oil	X	X	X	X
Glacial Acetic Acid	X		X	
Glycerol	X		X	X
Heptane	X	X	X	X
Hexane	X	X	X	X
Hydrazine	X		X	
Hydrochloric Acid	X		X	
Hydrofluoric Acid	X		X	
Hydrogen Cyanide	X	X	X	
Hydrogen Peroxide	X		X	X
Isobutyl Alcohol	X	X	X	X
Isobutyric Acid	X	X	X	
Isopropyl Acetate	X	X	X	X
Isopropyl Alcohol	X	X	X	X
Kerosene	X	X	X	X
Keytones	X	X	X	X
Linseed Oil	X	X	X	X
Lubricating Oil	X	X	X	X
Magnesium Hydroxide	X		X	
Methyl Alcohol	X	X	X	X
Methyl Chloride	X	X	X	
Methyl Ether	X	X	X	X
Methyl Ethyl Ketone	X	X	X	X
Methyl Propionate	X	X	X	X
Mineral Oil	X	X	X	X
Motor Oil	X	X	X	X
Naphthalene	X	X	X	X
Nitric Acid	X		X	

Chemical	Universal	Oil only	Chemical	Organic
Nitrobenzene	X		X	
Nitrobenzoic Acid	X		X	
Nitrotoluene	X	X	X	X
Octane	X	X	X	X
Oleic Acid	X	X	X	
Olive Oil	X	X	X	X
Paraffin	X	X	X	X
Perchloroethylene	X	X	X	X
Petroleum Ether	X	X	X	X
Phenol	X		X	X
Phosphoric Acid	X		X	
Plating Solutions	X		X	
Potassium Hydroxide	X		X	
Propanol	X		X	X
Propionic Acid	X	X	X	
Propyl Alcohol	X	X	X	X
Propylene Glycol	X	X	X	X
Quinoline	X		X	
Resorcinol	X		X	
Salt Solutions (metallic)	X		X	X
Silicone Oil	X	X	X	X
Silver Nitrate	X		X	X
Soap Solution (concentrated)	X	X	X	X
Sodium Bicarbonate	X		X	X
Sodium Bisulfite	X		X	
Sodium Chloride	X		X	X
Sodium Hydroxide	X		X	
Sodium Hypochlorite	X		X	X
Sodium Nitrate	X		X	X
Stannic Chloride	X		X	
Starch	X		X	X
Styrene	X	X	X	X
Sucrose	X		X	X
Sulfuric Acid	X		X	
Synthetic Motor Oil	X	X	X	X
Tannic Acid	X		X	
Toluene	X	X	X	X
Transformer Oil	X	X	X	X
Trichloroethylene	X	X	X	X
Triethylene Glycol	X	X	X	X
Turpentine	X	X	X	X
Urine	X		X	X
Vinyl Acetate	X	X	X	X
Vinegar	X		X	X
Xylene	X	X	X	X

Disclaimer: The above information is provided as a guide only. No claims or warranties are expressed or implied as to the absolute accuracy of the data supplied. In all cases it is assumed chemicals in question are at ambient temperatures and pressure and are used in basic state, not in combination or mixtures. Small test samplings by user is always recommended to ensure safe application.